


SIGNODE **AMPT-12**

Combination Strapping Tool

for use with Signode Dylastic®, Dymax® and Tenax® Plastic Strapping

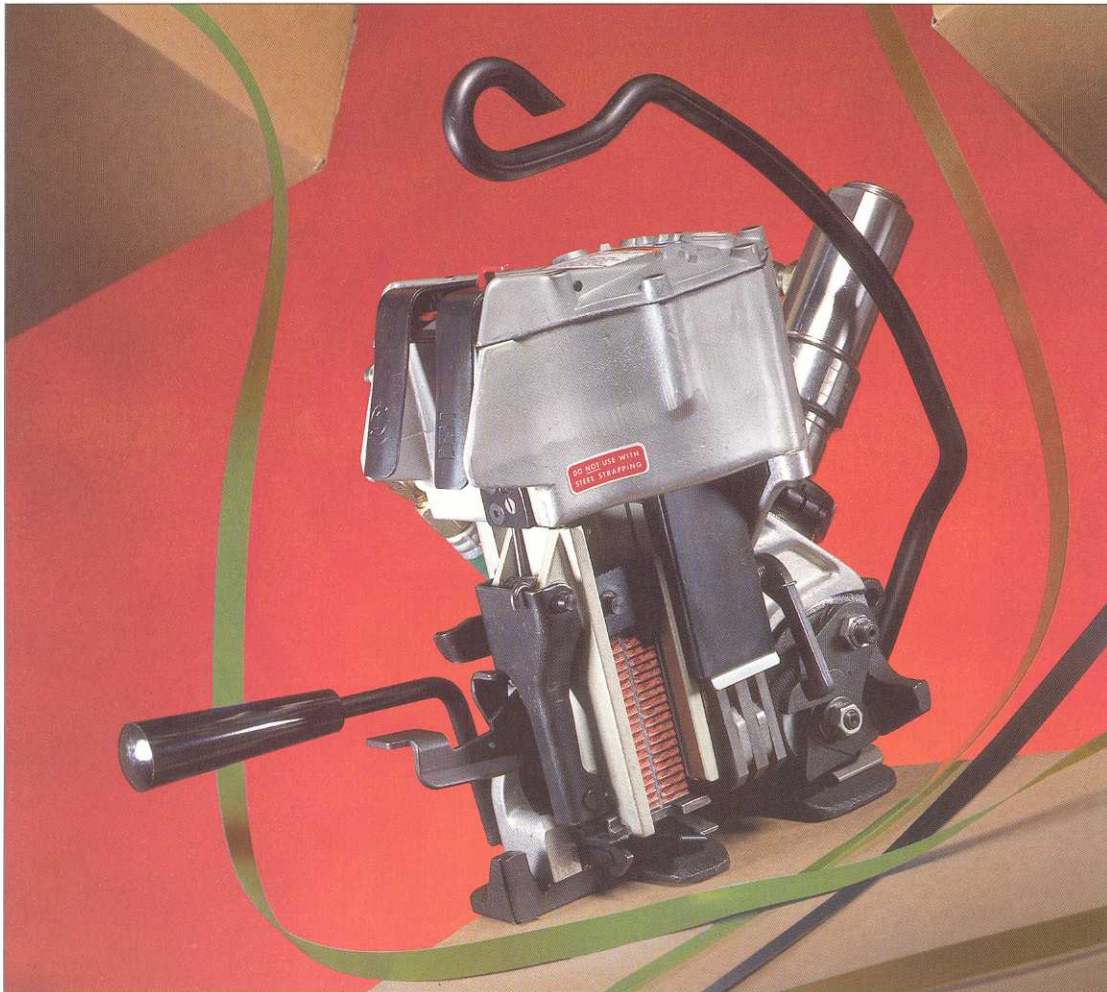

Features and Benefits


One tool for all 12.7mm strap types – this pneumatic combination tool can be used on all Signode 12.7 mm plastic strapping.

Proven design – based on the design of Signode's robust, reliable and durable AMP steel tool, the AMPT-12 is of all metal construction with no plastic operating parts.

Poor air quality tolerance – AMPT-12 can operate successfully in situations where air supply is of an inconsistent quality.

High joint strength – AMPT-12 offers the security of a metal seal – each seal has sharp serrations in-built to guarantee maximum joint strength with no slippage.

Easy to use – ergonomically designed with simple two button operation.

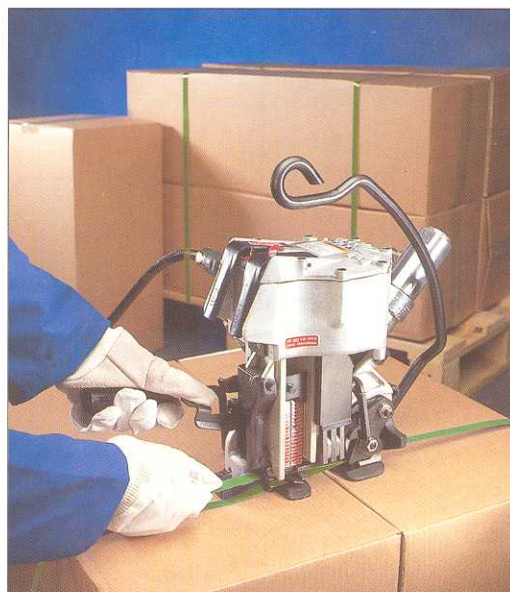

SIGNODE **AMPT-12** Combination Strapping Tool

for use with Signode Dylastic[®], Dymax[®] and Tenax[®] Plastic Strapping

Design, function and operation

The AMPT-12 pneumatic combination tool has been specifically designed for applications requiring a robust tool capable of applying 12.7 mm plastic strap, together with the additional security of a metal seal. Ergonomically designed, the AMPT-12 is simple and efficient to operate. It features a quick cartridge loading facility for its specially designed seals and two button operation, one for

tension and one for seal and cut off.

An important feature of the AMPT-12 is its ability to work when the air supply is of a poor quality, making the tool more forgiving in such situations.

Based on the proven AMP steel tool design the AMPT-12 is extremely robust and offers the benefits of long term durability, even in the most demanding applications.

High tension capability

AMPT-12 provides the high tensioning capabilities required to elongate all types of Signode 12.7mm plastic strap.

Easy to Operate

Simple and easy to use. AMPT-12 features the same loading, tensioning and sealing sequence as the well-established AMP tool.

Reliable and Durable

Based on the well proven AMP design, AMPT-12 is reliable, durable and suitable for the most demanding applications.

Easy to Repair & Service

Repair and servicing is simple and fast, reducing tool downtime.

Metal Seal Security

The specially designed metal seal has sharp serrations in-built to provide a strong joint with no slippage!

Pneumatic Power

Operates efficiently even when air quality is poor.



Dimensions and Performance

Weight	9.7 kg
Base Length	185 mm
Overall Length	430 mm
Width	130 mm
Height	360 mm
Maximum Applied Tension	2000N

Strapping

AMPT-12 is designed for use with all Signode 12.7 mm plastic strapping including Dylastic[®] polypropylene strap, Dymax[®] nylon strap and Tenax[®] polyester strap.

For further information please contact the sales office.

SIGNODE[®]

An ITW Company
© Signode 1998

P260 E 9/98
Printed in the U.K.



Signode has a policy of continuous product development and reserves the right to alter specifications at any time without prior notice.